





Cleaning and Conservation


Naval industry

Industrial Maintenance

ACTIV 7

AQUEOUS, SUPER-CONCENTRATED, HEAVY DUTY DEGREASER

Properties	Packaging (It)
Superior, concentrated degreaser, extremely effective at removing animal, vegetable and mineral fats.	5 - 30 - 210 - 1000
Its composition, with new surfactants, replaces aggressive solvents and offers a wide range of applications.	
Recommended use	
Automotive industry Engines and chassis, metal parts, installations, equipment and tools in general.	
Naval industry Deck, engine room and cargo hold cleaning. May be discharged into the sea when used to clean cargo holds and external surfaces on ships (MARPOL AnnexV)	
<u>Industrial Maintenance</u> Installations and equipment in general.	

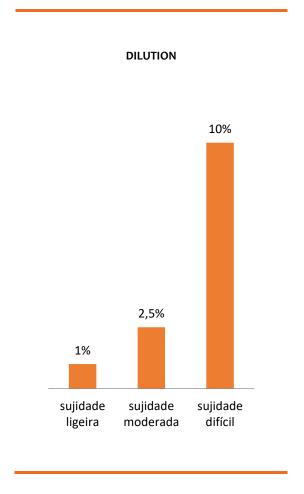

Technical Data Sheet







Cleaning and Conservation Naval industry Industrial Maintenance

TECHNOLOGY / ADVANTAGES

- Solvent-free
- Safe on metal, glass, plastic and rubber
- Concentrated, water-soluble
- Biodegradable
- Non-flammable
- VOC-free
- Does not contain EDTA or NTA

Physical and chemical characteristics

Physical condition:

Red Liquid

Odour:

Characteristic

Characteristic

<u>рН</u>:

13 <u>+</u>-0,5

Density at 20°:

1.01 - 1.05 (kg/L)

Surfactants:

>=15%

The data described above correspond to typical values and should not be considered as a specification.

APPLICATION

General Cleaning

ACTIV 7 can be applied by brush, hand spray, high and low pressure washing machines etc.

Dependent on degree of contamination typical dosage is about 1-5%.

Removal of soot from IGS and Cargo Hold

- 1. Apply ACTIV 7 with High Pressure Cleaning Machine diluted 1:4 (25%) with water.
 - If used with a hand sprayer, apply undiluted on the surfaces, allowing 1 litre per 12m².
- 2. Leave for about 30-45 minutes. The surface remains wet.
- 3. Wash down with hot water (80°C) and check the results.
- 4. Repeat the procedure if necessary.

Compatibility with materials

It is compatible with most metals, plastics, rubbers, glass and other materials.

Important:

Not suitable for copper alloys or light alloys such as aluminium. It is recommended to test the materials individually before prolonged use.

Do not apply to painted surfaces without prior testing.

HANDLING







Cleaning and Conservation Naval industry Industrial Maintenance

Storage

Store in the original container, tightly closed and in a cool place. Keep locked away out of reach of children.

Safety precautions

Do not mix with other products. In case of contact with eyes, rinse immediately with running water and seek medical advice. Wear suitable gloves and eye/face protection.

Attention

- Proper use is the responsibility of the applicator.
- Make sure you are using the most up-to-date versions of the Technical Data Sheet and the Safety Data Sheet.
- For professional use only. Keep away from children

Chemzy Portugal Lda.

Jardia Business Park - BL 2870-607 Montijo

www.chemzy.pt

Customer Service and Technical Support 212 313 516

Warranty

The indications given on our labels, information, technical sheets or manuals are the result of laboratory tests or field applications, which have proved to be predominantly significant under normal application conditions. The results obtained under these conditions have enabled us to define general recommendations, which should be adapted to individual cases. Our responsibility is expressly limited to the supply of carefully controlled products and their proper application when under our control.

Ordering and receiving the products implies acceptance of the guarantee in the terms indicated above, even when the purchase order does not specify this or indicates otherwise.

No representative is authorised to take out an additional guarantee on our behalf following the sale of our products. Chemical products can cause serious injury. Before use, consult the Safety Data Sheet and follow its instructions to prevent accidents at work.

The buyer must determine the suitability of the product for its intended purpose, assuming the duty to check all the factors surrounding its application, such as the characteristics and finish of the materials/surfaces to be treated, environmental conditions, professionalism of the applicator, etc.

We always recommend carrying out a preliminary test on the surface to be treated. We accept no liability for incorrect use of our products.

For professional use only.

Last revised 09/20